



MOUSSEAL®-CF F-30 #2044



FOAM EXTINGUISHING AGENT FOR EXTINGUISHERS

MOUSSEAL®-CF F-30 is a ready-to-use liquid fire firefighting foam agent based on organic and inorganic salts as well as special surface and inter-face-active surfactants, which meets particularly high requirements for extinguishing performance.

MOUSSEAL®-CF F-30 is defined and particularly suitable for use in mobile extinguishers (e.g. hand-held fire extinguishers), small extinguishing systems or for filling feed lines for wet systems.

Due to the increased frost protection, MOUSSEAL®-CF F-30 can be stored and used outdoors at temperatures well below 0°C.

Performance

A special combination of selected surfactants and salts enables very efficient wetting of solid fuels and ensures deep penetration of the extinguishing salts into the fire material. This rapidly extinguishes the active fire or embers in the depth of the fuel and sustainably prevents re-ignition.


Water film-forming fluorosurfactants provide excellent extinguishing performance on non-polar*¹ liquids. The water film is formed when extinguishing non-polar liquids. It forms from the foam solution draining out as a thin, aqueous film between the foam blanket and the fuel on which the foam blanket can glide very well, hence spread particularly quickly.

Technical Specification

Appearance	colourless/yellow
Fire Class/-es	A + B + F
Lowest Use Temperature	-30 [°C]
Max. Storage Temperature	max. +50 [°C]
Specific Gravity (20°C)	1,090 ± 0,02 [g/ml]
pH value (20°C)	7,5 - 8,5
Viscosity (20°C)	< 10 [mm ² /sec]
Sedimentation	Sediment Free

Foam Properties acc. to EN1568 at 20°C

Induction Rate	100%
Expansion Rate	5 - 9
25% Drainage Time	17 - 21 [min]
50% Drainage Time	20 - 31 [min]
Expansion Types	Low Expansion Foam

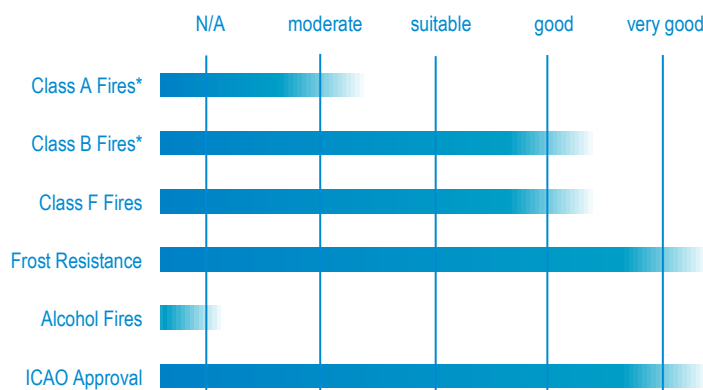

*as mentioned in the respective test standard or in the text

Performance Tests

- DIN EN 1568** EN 1568:2008 - Approval-No.: KB-57/16 Part 3 (Heptane): IIC/-
- ICAO** ICAO Airport Services Manual Low Expansion Foam --- Level B
- DIN EN 3** 13A --- 144B --- 40F

¹ flammable liquids that are not miscible with water.

Application

MOUSSEAL[®]-CF F-30 is a ready-for-use agent for use in fire extinguishers and extinguishing systems for extinguishing solids (class A fires) and non-polar*¹ liquids (class B fires) according to DIN EN 3.

Unlike pure water, a solution of *MOUSSEAL*[®]-CF F-30 can wet the surface of Class A fuels very efficiently, thus achieving an excellent cooling and extinguishing effect. Due to the addition of performance boosting fluoro-surfactants, *MOUSSEAL*[®]-CF F-30 can also be used as a non-expanded, aqueous solution on non-polar*¹ hydrocarbons (e.g. petroleum products) and in foam/water sprinkler systems.

MOUSSEAL[®]-CF F-30 is applied undiluted as low expansion foam or finely diluted spray directly onto the burning material.

Compatibility

When mixing different firefighting foam agents, it must be considered that the resulting mixture is a new chemical product which is not tested as firefighting foam agent and also must be re-evaluated and labeled according to hazardous materials regulations.

MOUSSEAL[®]-CF F-30 can be mixed with similar firefighting foam agents in any ratio for immediate consumption, e.g. in case of emergency. Mixtures of *MOUSSEAL*[®]-CF F-30 with other firefighting foam concentrates are not suitable for storage - not even short term.

The foam produced from *MOUSSEAL*[®]-CF F-30 is fully compatible with all other ready expanded firefighting foams.

MOUSSEAL[®]-CF F-30 must never be mixed with protein, multi purpose or alcohol resistant AFFF firefighting foam agents or F3 type firefighting foam agents! Even the smallest quantities can render the products concerned non-useable, respectively lead to precipitation or agglomeration and consequently to equipment failure.

Any information in this product data sheet bases upon our best knowledge and expertise at the time of this issue. We reserve the right to change the content of this document or adopt to newer information. Please ask for the most recent revision of this data sheet.

Storage & Shelf Life

When synthetic firefighting foam agents and concentrates are stored, only certain materials and also only in certain combinations are suitable for permanent media contact. Our detailed Technical Information Nos. 014 (Storage of synthetic firefighting foam concentrates) and 009 (Material suitability polymers) provide information on this and other important aspects for the optimum storage of our products. Please do not hesitate to contact us.

Environment

After use, all parts which were in contact to *MOUSSEAL*[®]-CF F-30 must be thoroughly rinsed with water and cleaned to prevent any product buildup. Dried-in adhesions may require longer time soaking for removal.

The product contains organic fluorine compounds which cannot be completely degraded in the environment. Unused product (concentrate) must not be released into the environment. Disposal must be carried out in consultation with local authorities and specialised waste treatment companies.

Please also note further information in our safety data sheet!

Transport

MOUSSEAL[®]-CF F-30 is available in the following packaging units: PE-canister (20 ltr, 25 ltr and 60 ltr), PE-canister according to DIN 14452 (20 ltr); PE-drum (200 ltr), PE-IBC (600 ltr und 1.000 ltr) or bulk.

Please contact us for special packing sizes.



For further Documentation please scan the Qr code or see <http://sthamer.de/qr/2044>



Safety Advice: Please bear in mind that foam solutions are electroconductive liquids. The use in proximity to electrical/electronic equipment can require specific safety measures.



Safety Advice: Please see our Technical Information regarding "Mixing of Foam Concentrates" for further information

Disclaimer:

Any information in this product data sheet bases upon our best knowledge and expertise at the time of this issue. We reserve the right to change the content of this document or adopt to newer information. Please ask for the most recent revision of this data sheet.

Main Office Hamburg Liebigstr. 5 22113 Hamburg GERMANY Tel.: +49 (0)40 73 61 68-0 Fax: +49 (0)40 73 61 68-60	Sales Office Hannover Hartenbrakenstr. 54 30659 Hannover GERMANY Tel.: +49 (0)511 768 358-45 Fax: +49 (0)511 768 358-46	Sales Office Jena Carl-Pulfrich-Str. 1 07745 Jena GERMANY Tel.: +49 (0)3641 63538-57 Fax: +49 (0)3641 63538-59	Office Frankenthal Siemensstr. 4 67227 Frankenthal GERMANY Tel.: +49 (0)6233 3796-605 Fax: +49 (0)6233 3796-622	info@sthamer.com www.sthamer.com	
--	---	--	---	--	--